

SRH60130 系列导电滑环SRH60130

SRH60135 Series Through-Bore Slip Ring

型号选用说明 Model Explanation

SRH	60130	-	6	/	12	
						12代表12个通道 (每通道5A) 12: 12 channels (5A/channel)
						6P代表6个功率通道 6P: channels for power
						130代表外径130mm 130: outside diameter 130mm
						60代表过孔内径60mm 60: through bore diameter 60mm
						SR代表导电滑环 SR: slip ring
						H代表过孔系列 H: slip rings with a hole (through bore)




型号 Model	长度 (L=mm)	额定电流 Rated Current		总路数 Total No. of Circuits
		功率P(10A、15A或20A)	信号S(5A)	
SRH60130-6P	66	6	-	6
SRH60130-12S	90	-	12	12
SRH60130-12P	90	12	-	12
SRH60130-6P/12S	114	6	12	18
SRH60130-24S	138	-	24	24
SRH60130-18P	114	18	-	18
SRH60130-12P/12S	138	12	12	24
SRH60130-6P/24S	162	6	24	30
SRH60130-36S	186	-	36	36
SRH60130-24P	138	24	-	24

可按客户需求定制到 96 通路

Max 96 circuits available on request

外形尺寸 OUTLINE DIMENSION 单位(UNIT) mm

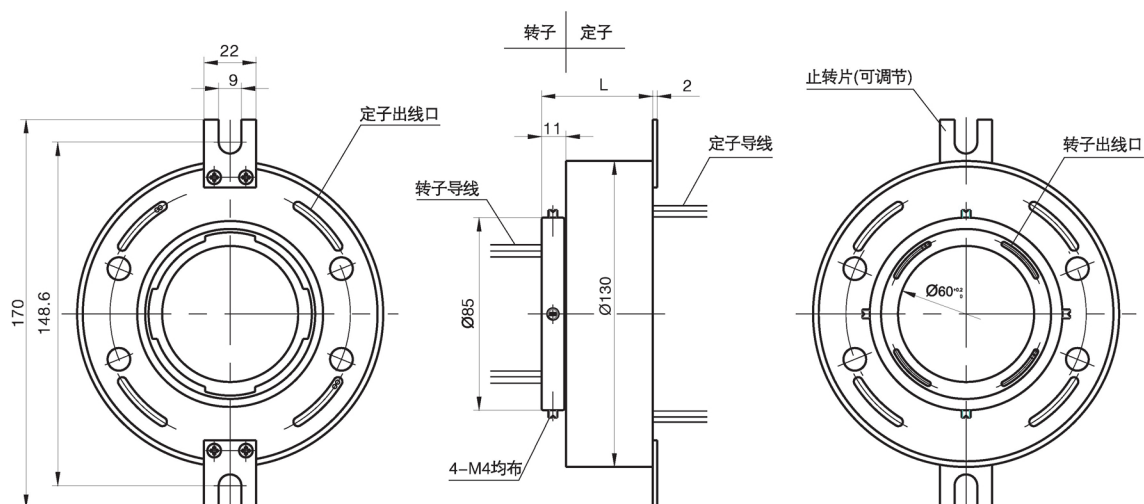

特点 Characteristic

完全满足360度无限制旋转的动力、控制及数字信号混合传输；采用先进的纤维刷技术，免维护，无需润滑油；每环多点接触，低接触压力，低噪音和低接触磨损，超长的使用寿命；标准化、模块化设计，产品规格齐全，并能为客户量身定制所需要的产品。

Continuous transmission of power and /or signal under 360° unrestrained rotation; applied advanced fibre brush technology, free of maintenance or lubricating oil; multi contact points in each ring, low contact pressure, low noise, low contact wear, extremely long-life; standardized & modularized design; and customized solutions available

可选项 Option

额定电流、电压、额定转速、工作温度、环道数、外壳材料及颜色、外型尺寸、专用导线、导线出口方向、导线长度、防护等级、端子类型

Current, rated voltage, rated speed, temperature, Luten, shell material and color, shape size, special wire, wire length, direction of export, protection grade, terminal type

典型应用 Typical Applications

工业机器加工中心、旋转工作台、重型设备塔台、电缆卷盘、试验设备、包装设备、堆垛机、磁性离合器、工艺控制设备、旋转传感器、紧急照明设备、机器人、展览 / 显示设备、医疗设备。

Industrial machine-maching centers, rotary index table, heavy equipment turrets, cable reels, test equipment, packaging equipment, palletizing machines, magnetic clutch, process equipment; rotary sensors, emergency lighting, robotics; exhibit display equipment, medical equipment.

产品安装示意图 Installation Diagram

